


OUR OTHER SHADOWLINE PROFILES


CADERPLAC L

For 12,5 mm and 15 mm gypsum boards with thin edges

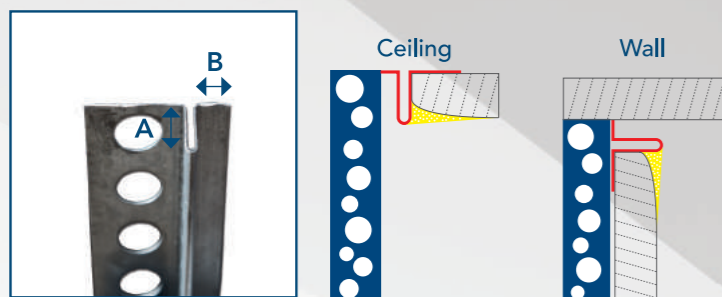


CADERPLAC U 0171

For 12,5 mm gypsum boards with thin edges

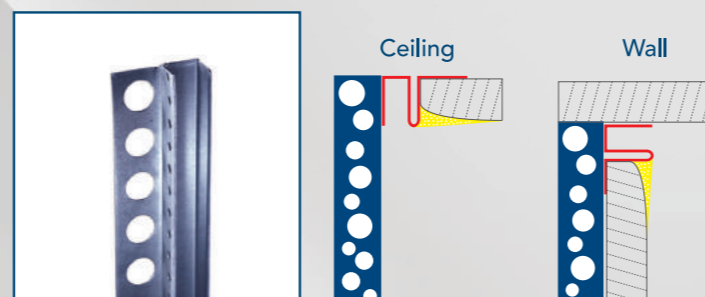


CADERPLAC L PVC 8026

For 9,5 to 25mm gypsum boards

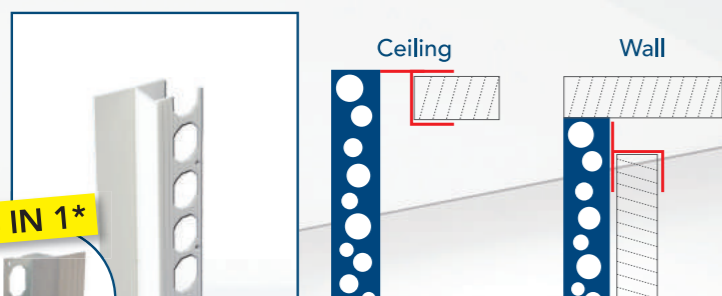

CADERPLAC U PVC 8027

For 9,5 to 25mm gypsum boards

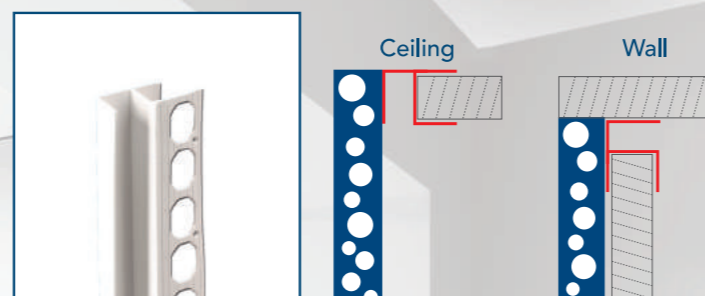

4 IN 1*

* Shadowgap : 20 / 15 / 10 or 5 mm

Ref.	Board	A (H)	B (Shadowgap)	Dimension	Pces/pack	Packs/Pallet
CADERPLAC L 0161	12,5 mm	14 mm	4 mm	3,00 m	15	80
CADERPLAC L 0162	12,5 mm	14 mm	6 mm	3,00 m	15	80
CADERPLAC L 0169	12,5 mm	14 mm	10 mm	3,00 m	15	80
CADERPLAC L 0163	12,5 mm	14 mm	15 mm	3,00 m	15	80
CADERPLAC L 0170	12,5 mm	14 mm	20 mm	3,00 m	15	80
CADERPLAC L 0165	15 mm	16 mm	4 mm	3,00 m	15	80
CADERPLAC L 0166	15 mm	16 mm	6 mm	3,00 m	15	80
CADERPLAC L 0167	15 mm	16 mm	10 mm	3,00 m	15	80
CADERPLAC L 0168	15 mm	16 mm	20 mm	3,00 m	15	80


Ref.	Board	Dimension	Pces/pack	Packs/Pallet
CADERPLAC U 0171	12,5 mm	3,00 mm	15	80

Ref.	Board	Dimension	Pces/pack	Packs/Pallet
CADERPLAC L PVC 8026	9,5 à 25 mm	3,00 mm	15	80

Ref.	Board	Dimension	Pces/pack	Packs/Pallet
CADERPLAC U PVC 8027	9,5 à 25 mm	3,00 mm	15	80

MDB
PROFIL
A DIVISION OF MDB

PLACSTOP Z

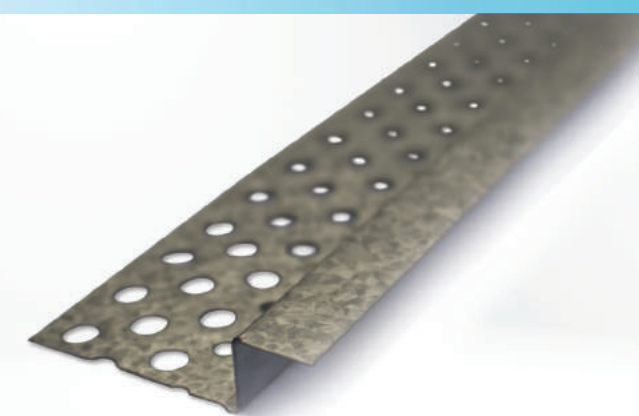

AND OTHER SHADOWLINE PROFILES



Shadowline profile « PLACSTOP Z 0195 »

Floor-to-ceiling perfect finishing...

Technical specifications :

- Made out of pre-slitted ALUZINC (AZ 150) coils following european norm EN 10215
- Standard dimensions : 2,50 M and 3,00 M
- Pieces / pack : 25 - Packs / pallet : 160
- Plaster thickness : 1 mm (ready-mixed joint finisher)
- For gypsum boards : 9,5 to 25 mm (straight edges boards)
- Shadowgap dimension : 10 x 10 mm

Placstop Z is a shadowline profile for gypsum boards from 9,5 to 25 mm thickness. Used vertically (for wall applications) or horizontally (for ceilings), it gives the best finishing touch to your interior, an elegant and distinguished relief, and it avoids the cracking that can appear at the junction between walls and ceilings.

Details make the difference !


Placement :

Easy to use, «Placstop Z» is mechanically fixed on the gypsum board using galvanized staples, before the finishing with a thin coat of ready-mixed joint finisher. The small round holes in the wing (3 mm and 5 mm ø) provide a perfect connection between the plaster, the board and the profile.


Application :

«Placstop Z » allows you to give an original touch to a flat ceiling, giving it an elegant look at the edges. Depending on your desires and your decorative tastes, the return of the profile can remain 'galvanized', but it can also be painted, or even receive a LED lighting in order to give a design touch to your interior!

Ceiling application

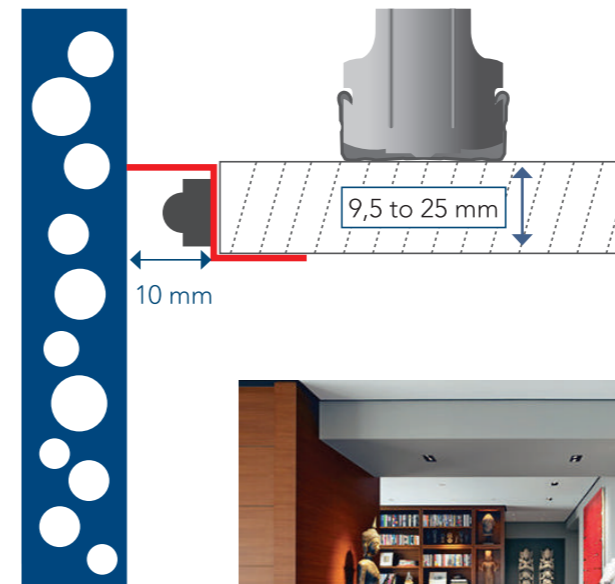



Wall application

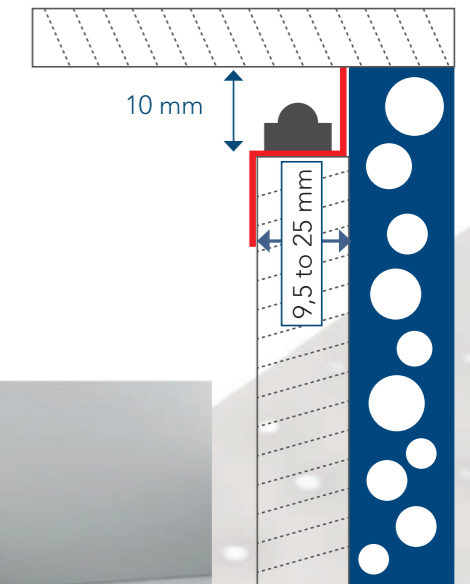

Ground application



Ground application

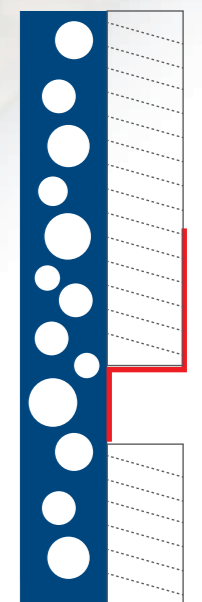

Ref.	Board	Dimension	Pces/Pack	Packs/pallet
PLACSTOP Z 0195	9,5 to 25 mm	2,50 m	25	160
		3,00 m		

